

B8 Grab Handle

Large · Surface mount


- Front or rear concealed installation
- Ergonomic, comfortable
- · High strength, lightweight solution

Material and Finish

Handle: ABS plastic, black Screws: Steel, zinc plated

Performance Details

Maximum static load: 775 N (175 lbf)



Flammability rating: UL94-HB

Operating temperature range: -40°C (-40°F) to 60°C (140°F)


Installation Notes

Maximum tightening torque of screws:

Rear install concealed only 4.0 N·m (35 in·lbf)

Notes

Bulk packaged



Part Number		
Rear Install Concealed	Front Install Concealed	
B8-66-3	B8-63-3	

Two slotted, thread forming screws (supplied with rear install 150 concealed only) (5.91)35 (1.38)20 51 (.79)(2.00)

Front Install Concealed

Part Number		
Rear Install Concealed	Front Install Concealed	
B8-66-3	B8-63-3	

Rear Install Concealed

For M5 or No. 10 screws (not supplied) Ø 7.5±0.1 (.295±.005) Max. screw head Ø 10.5 (.41) (2 places) 171.5±0.3 $(6.75 \pm .01)$ Max. 19.0 (.75) 171.5±0.3 Supplied




Ø 5.5±0.1


(.203±.005)

(2 places)

B8 Grab Handle






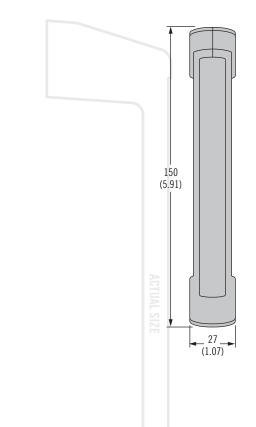

Supplied


Max. 16.0 (.63)

(with screws supplied)

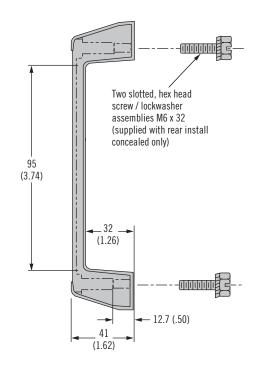

Part Number			
Rear Install Concealed Front Install Conc			
B8-45-3 B8-43-3			

Front Install Concealed





Rear Install Concealed

111±0.1

 $(4.37 \pm .005)$

 $\emptyset \begin{array}{c} 6.6 \, ^{+0.2}_{-0.0} \sim \\ (.26 \, ^{+.010}_{-.000}) \\ (2 \, \text{places}) \end{array}$


- Front or rear concealed installation
- Light-weight

Material and Finish

Handle: ABS plastic, black Screws: Steel, zinc plated

Performance Details

Maximum static load: 550 N (125 lbf)



Flammability rating: UL94-HB

Operating temperature range: -50°C (-60°F) to 60°C (140°F)

Installation Notes

Rear install concealed: M6 x 32 screw assembly supplied. Maximum tightening torque of screws: 4.0 N·m (35 in·lbf). For door thickness greater than 16 (.63) calculate screw length using the following formula: Door thickness + 16 (.63)


Notes

Bulk packaged

Handles


B8 Grab Handle






Product Code	Material	Load Capacity (Kg)
B8-DHURI-92	Polyamide	182





Product Code	Material	Load Capacity (Kg)
B8-DHURS-92	Polyamide	250






Product Code	Material	Load Capacity (Kg)
B8-DHURI-117	Polyamide	170









Product Code	Material	Load Capacity (Kg)
B8-DHURH-122	Polyamide	200





Product Code	Material	Load Capacity (Kg)
B8-DHUA-117-C	Polyamide	75
Standard Cap Colour is Black, Blue, Red & Yellow Caps are available on a minimum order of 50 nos each.		



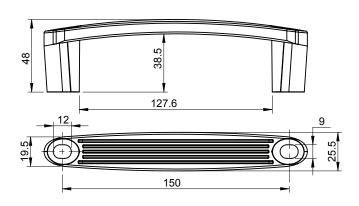


Product Code	Material	Load Capacity (Kg)
B8-DHUA-150-C	Polyamide	100
Standard Cap Colour is Black. Blue, Red & Yellow Caps are available on a minimum order of 50 nos each.		

Handles


B8 Angular Handle




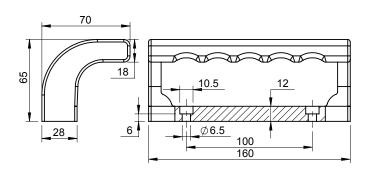


Product Code	Material
B8-DHAS-100	Polyamide







Product Code	Material	Insert Material
B8-DHAI-140	Polyamide	MS

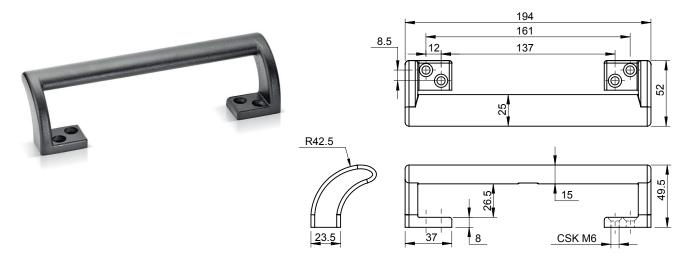


Product Code	Material	Finish
B8-DZAH-195-PC	Zinc	Black PC



B8 Sliding Window Latch





Product Code	Material	Cover Material	Finish	Locking Stroke
B8-DZWC2-L	Zinc	Polyamide	Black PC	12.5
B8-DZWC2-R	Zinc	Polyamide	Black PC	12.5

