



P8 Grab Handle

Surface mount


- Two styles and colour options available
- Concealed installation
- Four standard lengths

Material and Finish

Aluminum, anodized, clear or black
Stainless steel, passivated

Performance Details

Maximum working load: 1500 N
(335 lbf)




Installation Notes

Screws not supplied.
Calculate screw length using the following formula:
Door thickness + 5 (.20)
Maximum tightening torque of mounting screws: 1.7 N•m
(15 in lbf)

Part Number Selection

For visual identification:
M4 products have a counterbored hole. 8-32 products have a countersink hole

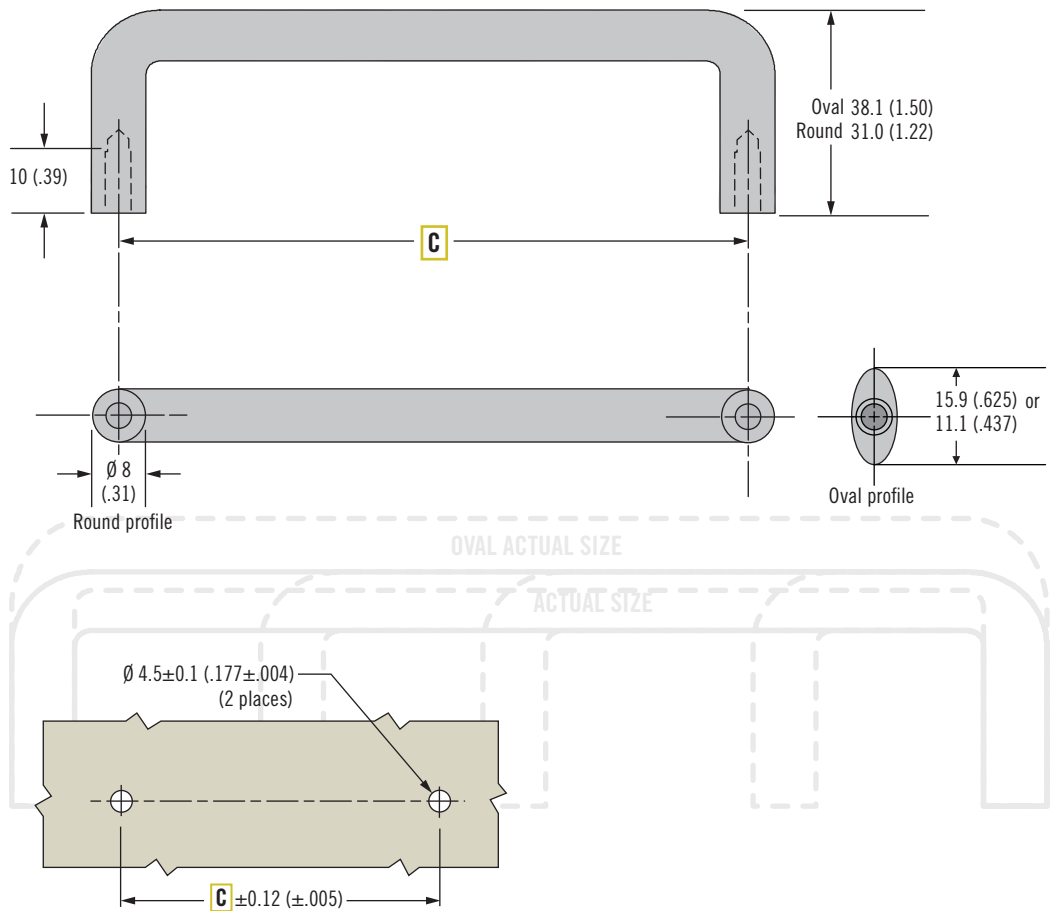

Round Profile

P8 - C - 31 - T - FF - P

- C** Centers
 - 030 30 (1.18) Hole Centers
 - 064 64 (2.52) Hole Centers
 - 096 96 (3.78) Hole Centers
 - 128 128 (5.04) Hole Centers
- T** Tapped mounting hole
 - 08 Imperial 8-32
 - M4 Metric M4 x 0.7
- F** Material/Finish
 - 11 Aluminum / Clear anodized
 - 15 Aluminum / Black anodized
 - 24 Stainless Steel, Passivated
- P** Packing option
 - Omit for individual packaging (1 per bag)
 - 3 Layer packaging contact Southco

Oval Profile

P8 - C - 38 - T D - FF - P

- C** Centers
 - 064 64 (2.52) Hole Centers
 - 096 96 (3.78) Hole Centers
 - 102 102 (4.02) Hole Centers
 - 128 128 (5.04) Hole Centers
- T** Tapped mounting hole
 - 10 Imperial 10-32
 - M4 Metric M4 x 0.7
- D** Profile
 - Q 11.1 x 7.1 (.44 x .28) Oval profile
 - V 15.8 X 7.1 (.62 x .28) Oval profile
- F** Material/Finish
 - 11 Aluminum / Clear anodized
 - 15 Aluminum / Black anodized
- P** Packing option
 - Omit for individual packaging (1 per bag)
 - 3 Layer packaging contact Southco