



SOUTHCO®	REV. DATE	DRAWN	REVISION	PART NUMBER	B8 GRAB HANDLE	DATE	DRAWN	CHKD	SCALE	DRAWING NUMBER
				B8-99-120		21JAN98				.5:1
PROPRIETARY ITEM - EXCEPT FOR USES EXPRESSLY GRANTED IN WRITING INFORMATION DISCLOSED HEREON IS CONFIDENTIAL AND ALL RIGHTS PATENT AND OTHERWISE ARE RESERVED BY SOUTHCO, INC.										
THIRD ANGLE PROJECTION 										
A4 PAPER SIZE 										

GENERAL PERFORMANCE GUIDELINES


THE INFORMATION SHOWN ON THIS PAGE WAS DETERMINED UNDER ONE SET OF TEST CONDITIONS. SINCE CONDITIONS VARY WITH EACH APPLICATION, IT IS SUPPLIED AS A GENERAL GUIDE ONLY. NO SAFETY FACTOR HAS BEEN APPLIED. WE RECOMMEND TESTING THE PRODUCT UNDER ACTUAL APPLICATION CONDITIONS TO DETERMINE ITS SUITABILITY FOR THE INTENDED USE.

MAXIMUM WORKING LOAD IS THE MAXIMUM THAT THE PRODUCT WILL WITHSTAND WITHOUT AFFECTING THE OPERATION OR APPEARANCE OF THE PRODUCT.


AVG. ULTIMATE LOAD CAUSE FAILURE OF THE PRODUCT OR SUFFICIENT DEFORMATION TO MAKE THE PRODUCT INOPERABLE.

NOTES :


1. MOUNTING SCREW TIGHTENING TORQUE NOT TO EXCEED 4 N-m (35 in-lbs).
2. COVER RETENTION - AVG. FORCE TO REMOVE COVER AFTER FIVE CYCLES IS 11 N (2.5 LBS).

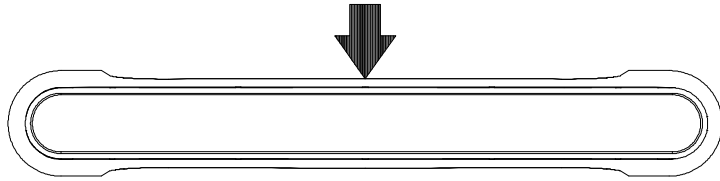

MAXIMUM WORKING LOAD: 775 N (175 LBS)
 AVG. ULTIMATE LOAD: 1721 N (390 LBS)

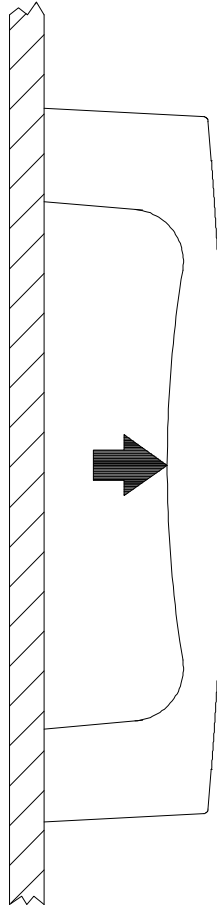

MAXIMUM WORKING LOAD: 775 N (175 LBS)
 AVG. ULTIMATE LOAD: 3168 N (720 LBS)

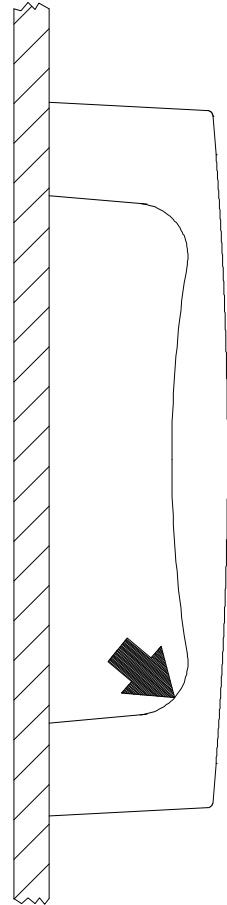

MAXIMUM WORKING LOAD: 775 N (175 LBS)
 AVG. ULTIMATE LOAD: 2122 N (480 LBS)